


# BKL System Cattaneo


## CM 415

|                 |          |
|-----------------|----------|
| max. Ausladung: | 41,00 m  |
| Spitzenlast:    | 1.250 kg |
| max. Traglast:  | 5.000 kg |
| max. Hakenhöhe: | 31,50 m  |

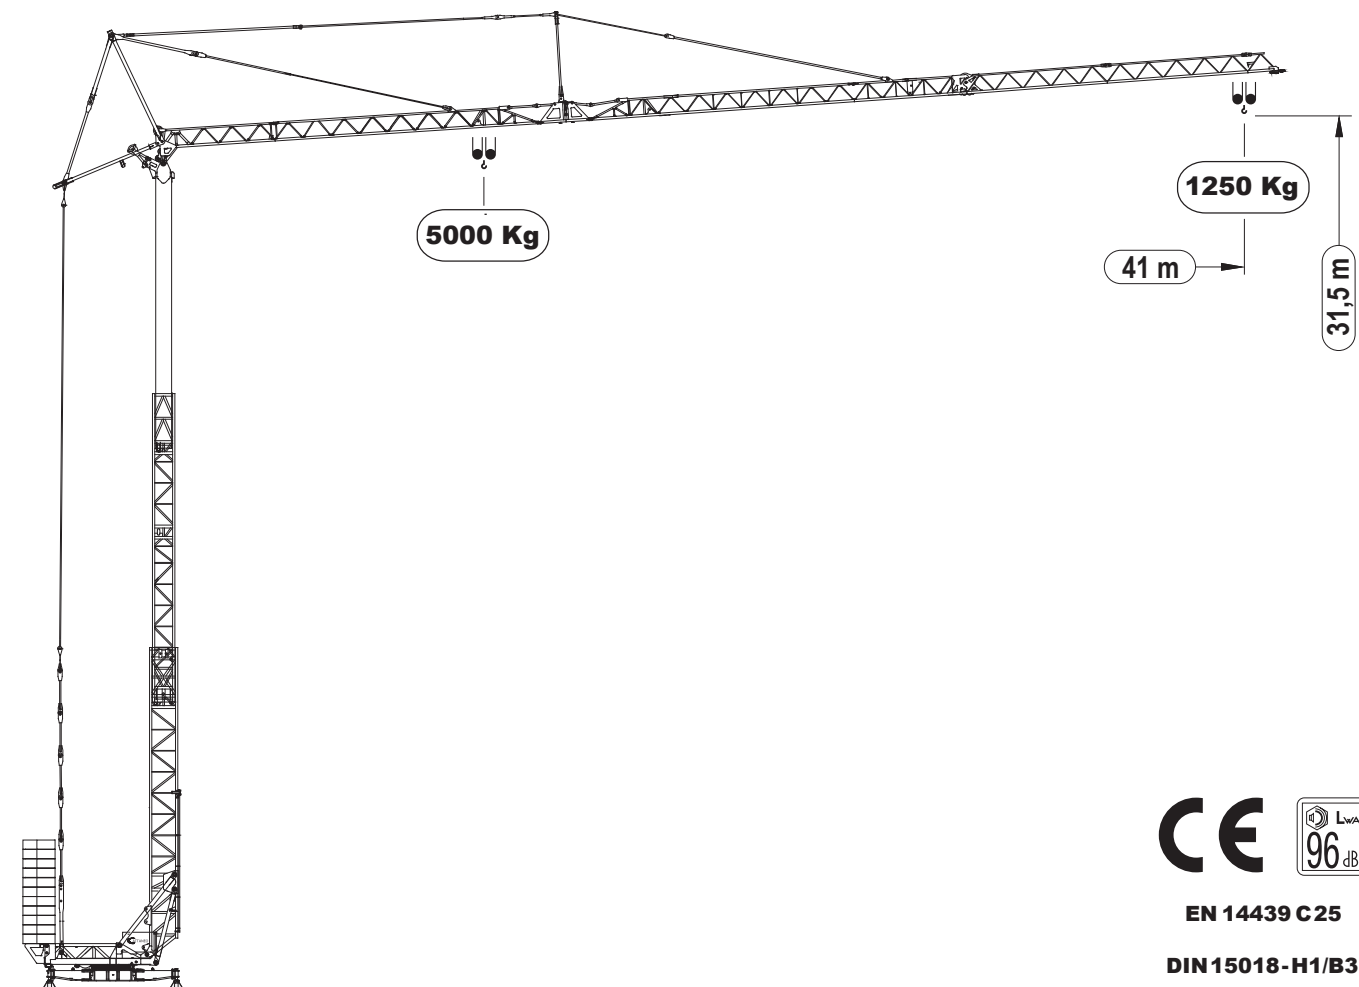

EN 14439 C25


DIN 15018-H1/B3

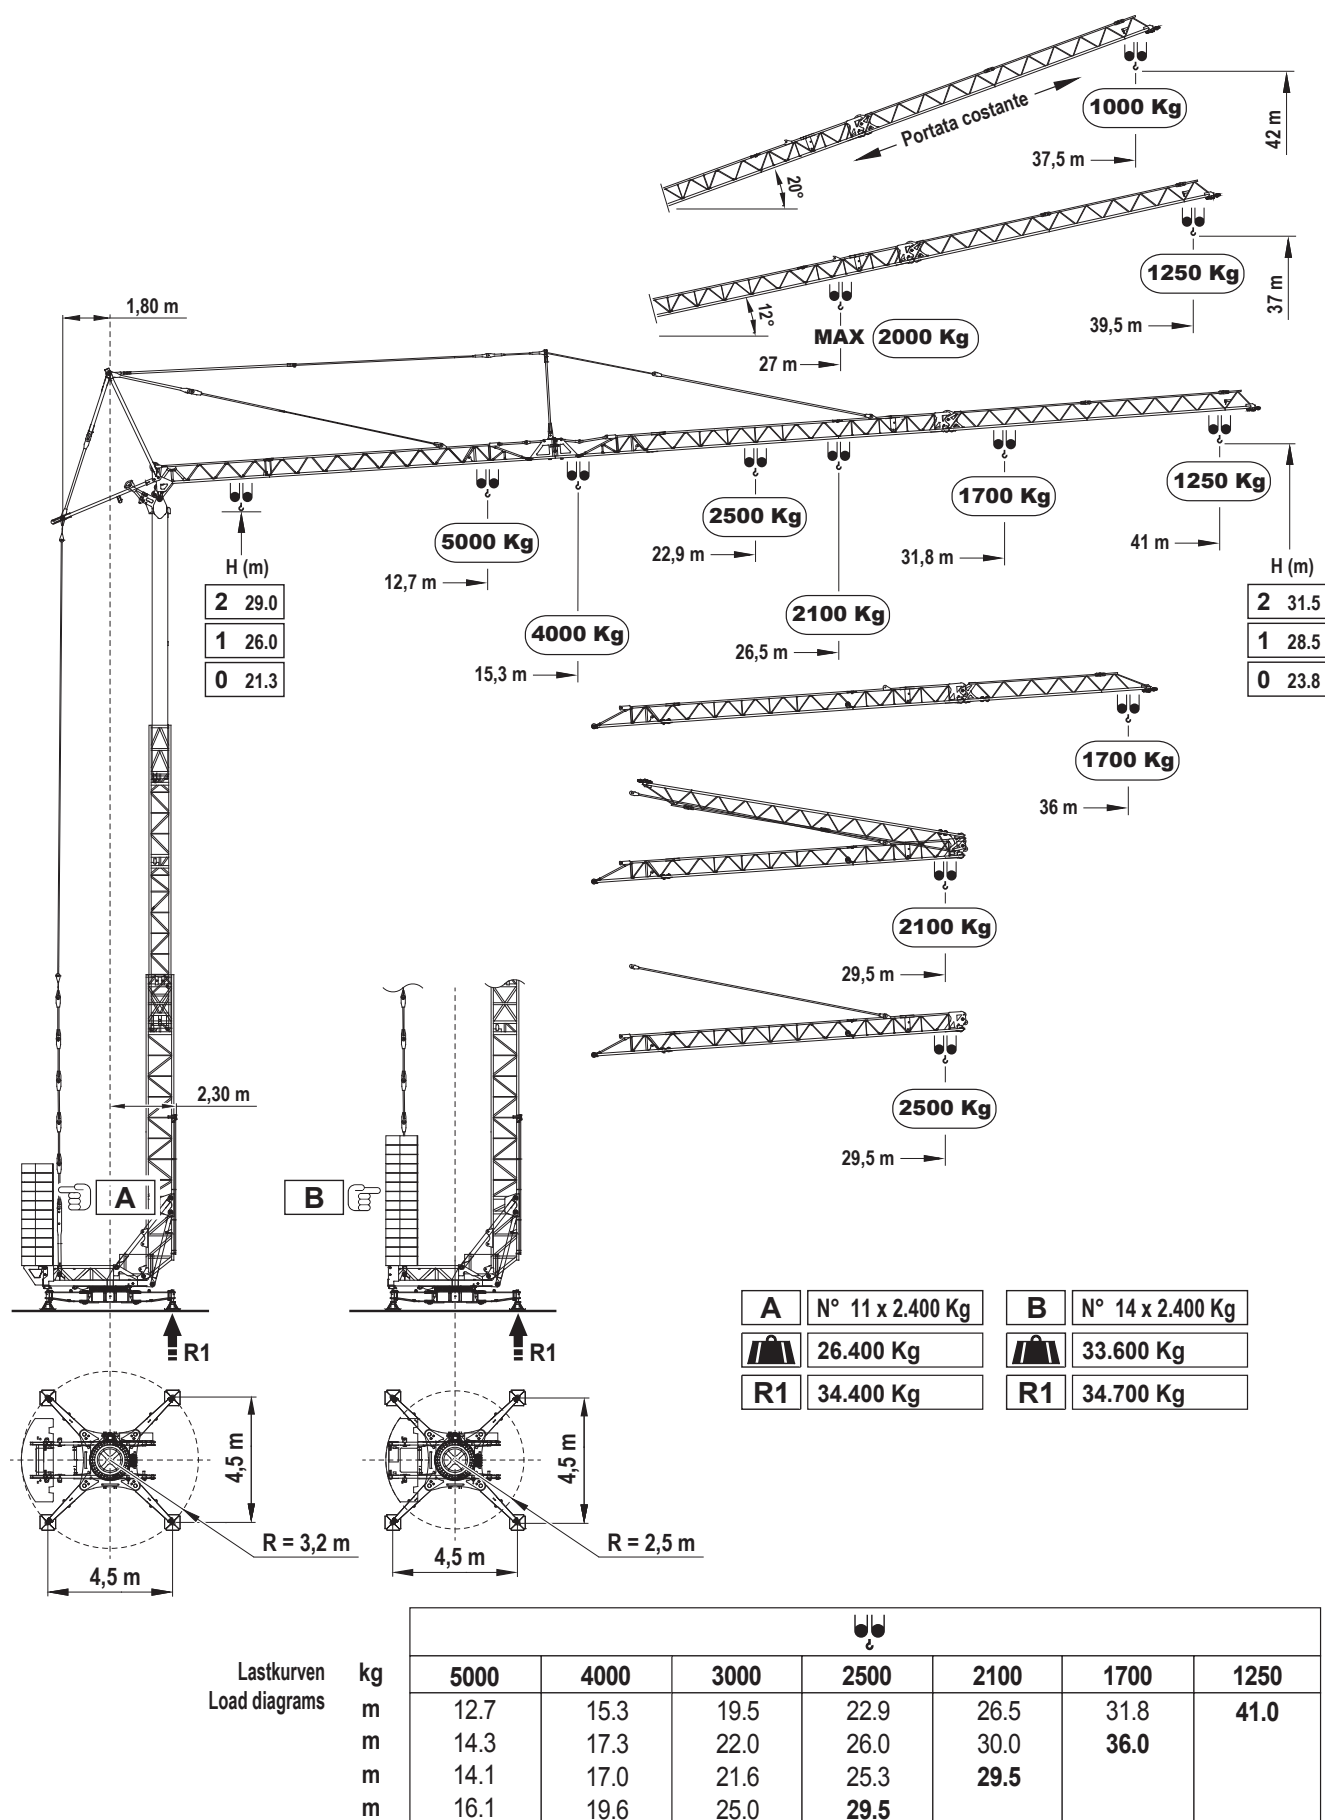

## Leistungen / Performance

|                  |  <b>kVA</b> |  <b>400V - 50Hz 20 kVA</b> |              |                 |       |       |       |
|---------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|--------------|-----------------|-------|-------|-------|
|                                                                                                   |                                                                                              |                            |              | 1°              | 2°    | 3°    | 4°    |
|  <b>inverter</b> | <b>kW</b><br>12,5                                                                            |                                                                                                             | <b>m/min</b> | 3,5             | 14    | 27    | 53    |
|                                                                                                   |                                                                                              |                                                                                                             | <b>kg</b>    | 5.000           | 5.000 | 2.500 | 1.250 |
|  <b>inverter</b> | 3,0                                                                                          | Kg 0 → 3.000                                                                                                | <b>m/min</b> | 18 - 37 - 50    |       |       |       |
|                                                                                                   |                                                                                              | Kg 0 → 5.000                                                                                                | <b>m/min</b> | 18 - 37         |       |       |       |
|  <b>inverter</b> | 5,5                                                                                          | <b>g/min</b>                                                                                                |              | 0,2 - 0,5 - 0,9 |       |       |       |

## Aufstellvorgang / Erection procedure

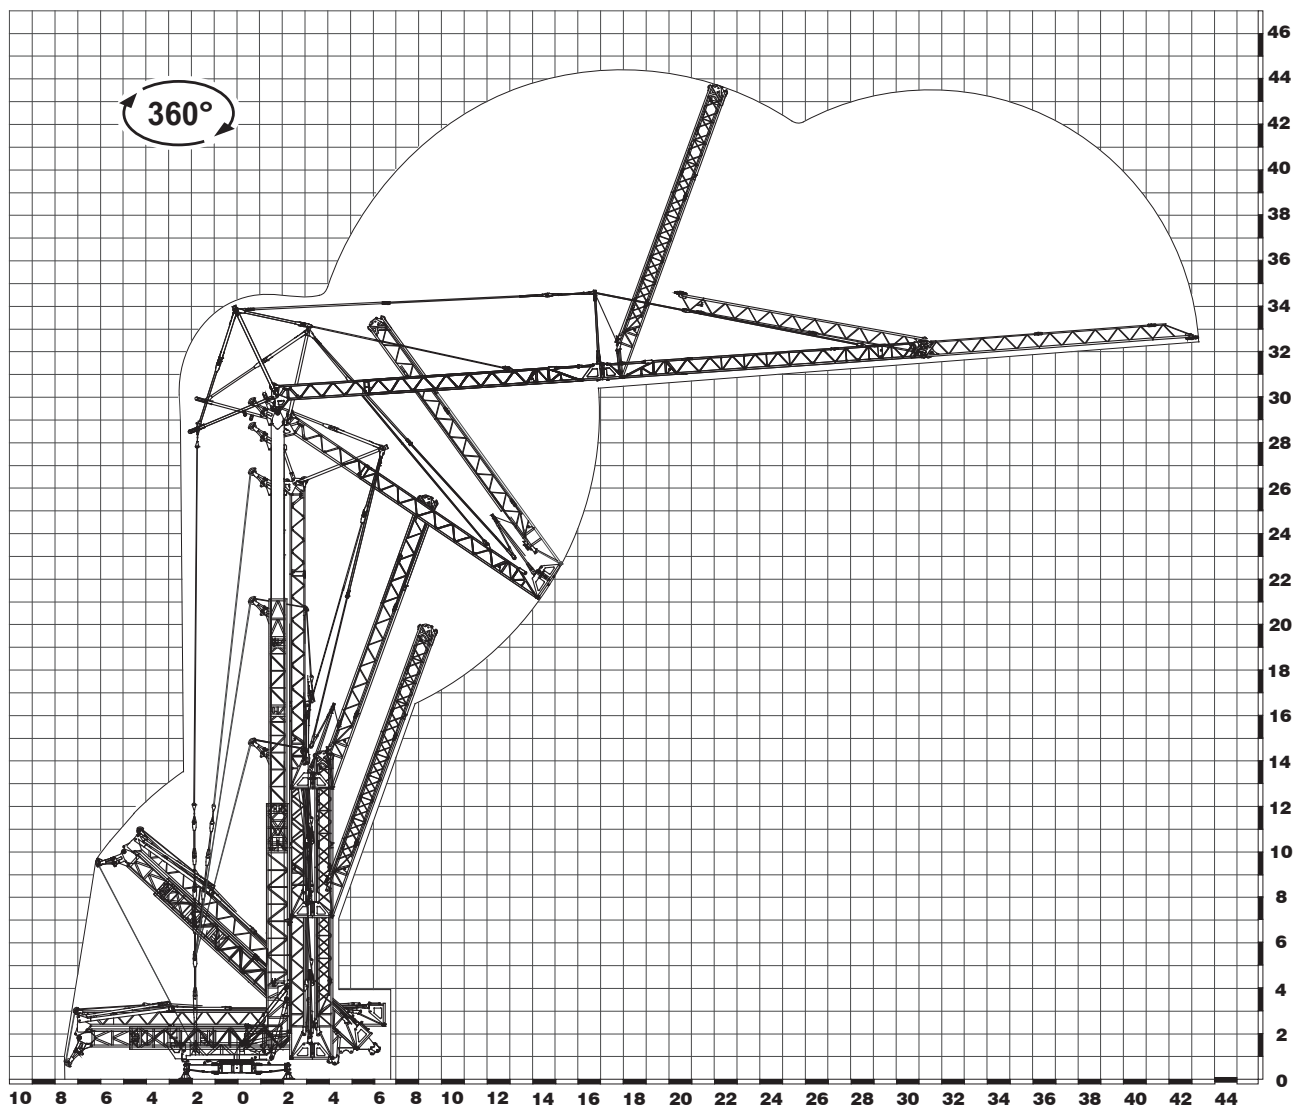

## Transport / Transport

